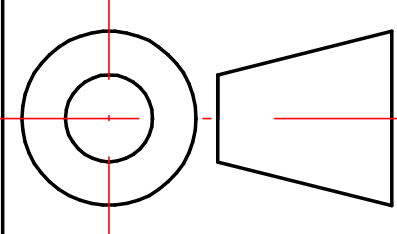


Lierspecificaties

Serienummer	: K19731
Type	: Elektrische kaapstander EPK-5000
Werklast (SWL)	: 5.000 kg op laag 1
Houdkracht	: 15.000 kg op laag 1
Uitvoering	: Standaard buislengte 550 mm
Inhaalsnelheid	: ca. 6,2 m/min op laag 1(1 snelheid)
Trommel	: $\varnothing 300 \times 370$ mm
Motorvermogen	: 6,0kW S2-10min
Voeding	: 400/690V 50Hz
Beschermklasse	: IP55 TEFC
Rem	: 100Nm 205Vdc/ voeding 400V
Conservering	: 2-laags coating RAL9005 met zink-fosfaat grondlaag behalve buis, moet in lasmenie
Inclusief opties	: geen
Gebruiksklasse	: T5-L2-M5 (vlgs FEM 1.001 en ISO 4301/1)
Gebruikstemperatuur	: -10° tot $+40^{\circ}$ Celsius

POS.No	Qty.	ARTICLE or DESIGNATION	MATERIAL or DRAWING NO.	DIMENSIONS
		DROMECC bv Steenoven 13 3911 TX RHENEN The Netherlands	SCALE: 1:10	COMMENTS: Break sharp edges Rev.A: tweedelige kop 
			UNIT: mm	
			DATE: 30.07.2019	
			DRAWN BY: JG	
DESIGNATION			DRAWING - REV.NO	SIZE
EPK-5000			K15009-A	A3

Toleranties according to ISO 2768-mL, unless otherwise specified complete welding a = 0,5 x thinnest sheet +1

Copyright Dromec bv - Notices to third parties is only allowed with written permission